

BRAIDED INSULATING SLEEVINGS

SILIGAINÉ® TN

-50 °C to +150 °C

BRAIDED EXPANDABLE SLEEVING
IN SINGLE-FILAMENT POLYESTER

Standards*

- IEC 60684-1 and 60684-2.
- IEC 60684-3 parts 340 to 342.

Applications

- Sheathing of electric cable harnesses
- Protection of assemblies subject to severe mechanical constraints (abrasion, cutting, alternate bendings, doorways, etc.) .

Options

- Sleeveings cut to length: contact us.
 - Grey braid: SILIGAINÉ® TG.
- Braid in Rilsan® single-filament braid for improved resistance to abrasion (wire of diameter 0.30 mm): SILIGAINÉ® RN or SILIGAINÉ® RG.
- Braid resistant to vertical flame (UL 1441-VW-1) in special single-filament polyester: SILIGAINÉ® TN-FR.

Packaging

- TN 03 to TN 10: 100 m rolls.
- TN 12 to TN 30: 50 m rolls.
- TN 40 to TN 50: 25 m rolls.



For this product, please contact:

OMERIN division principale ✓


Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division siliisol □

BP 87 - ZI du Devey - F 42000 Saint-Etienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
siliisol@omerin.com

omerin
LES CABLES DE L'EXTREME

OTHER PROTECTIVE SLEEVINGS

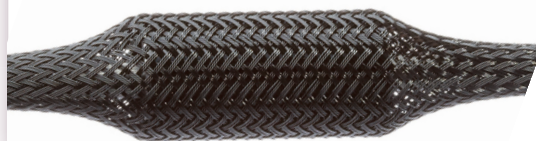

Characteristics General

- Continuous operating temperature: - 50 °C to +150 °C.
- Peaks at +220°C.
- Good resistance to oils and common chemical environments.
- Excellent resistance to humidity and mould.
- Excellent resistance to abrasion.
- Expandable sleeving for easy threading and wide range of overlapping diameters.

Standard products

- Colour: black.

INTERNAL DIAMETER**

Reference	Nominal diameter (mm)	Minimum diameter (mm)	Maximum diameter (mm)	TN Nominal wall thickness (mm)
TN 03	3	1	6	0.4
TN 04	4	2	7	0.4
TN 05	5	3	9	0.4
TN 06	6	4	11	0.4
TN 08	8	5	13	0.4
TN 10	10	6	17	0.4
TN 12	12	8	21	0.4
TN 15	15	10	24	0.4
TN 20	20	13	28	0.4
TN 25	25	14	36	0.4
TN 30	30	17	43	0.4
TN 40	40	25	60	0.4
TN 50	50	35	75	0.4

*Standards: our products comply with all or part of the requirements of standards quoted; contact us.

**The extra flexibility of this type of sleeving negates any need to show tolerances on the internal diameter. Rilsan® is an Arkema registered trademark.



www.omerin.com

® Registered trademark of the OMERIN Group. All information is indicative and may be modified without prior notice. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.