

HIGH TEMPERATURE WIRES AND CABLES
FOR THE GENERAL MARKET
SECTION I: CROSS LINKED ELASTOMERS

SILICABLE® H05S-K and H05S-U

USE <HAR> Approval
-60 °C to +180 °C

<HAR>

Approvals - standards

- USE <HAR> Approval as per standard NF EN 50525-2-41.
- Halogen-free: IEC 60754-1 / EN 60754-1.

Applications

- Cabling for household electrical heating appliances.
- Rotating machines (class H).
 - Lighting.
- Industrial cabling in hot atmospheres.

Characteristics General

- Continuous operating temperatures: -60 °C to +180 °C.
- Good resistance to thermal shock and UV.


Electrical

- Rated voltage: 300/500 V.
- Test voltage: 2000 V (as per NF EN 50525-2-41).

Standard products

- All colours including two-coloured.

SILICONE INSULATED AND/OR SHEATHED WIRES AND CABLES

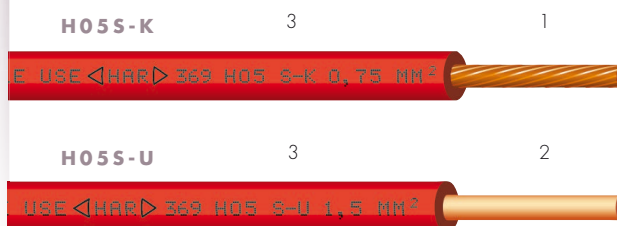

- 1 • Flexible bare copper, tin-plated, nickel-plated or silver-plated core - class 5 as per IEC 60228 / EN 60228.
- 2 • Solid bare copper or tin-plated core - class 1 as per IEC 60228 / EN 60228.
- 3 • Insulation: Silicone rubber - type EI2 - NF C 32-525-1 / NF EN 50525-1 / EN 50363-1.

H05S-K

Flexible core • class 5 as per IEC 60228

Nominal cross-section (mm²)	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km) (bare copper core)	Nominal thickness of insulation (mm)	Nominal diameter (mm)		Approximate linear weight (kg/km)
				min.	max.	
0.5	16 x 0.20	39.0	0.8	2.4	3.1	10.8
0.75	24 x 0.20	26.0	0.8	2.6	3.2	14.0
1	32 x 0.20	19.5	0.8	2.7	3.4	16.8
1.5	30 x 0.25	13.3	0.9	3.2	4.0	23.7
2.5	50 x 0.25	7.98	1.0	3.8	4.7	35.7

INSULATED WIRE

H05S-U

Solid core • class 1 as per IEC 60228

Nominal cross-section (mm²)	Nominal diameter (mm)	Maximum linear resistance at 20 °C (Ω/km)	Nominal diameter (mm)		Approximate linear weight (kg/km)
			min.	max.	
0.5	1 x 0.80	36.0	0.8	2.3	10.4
0.75	1 x 0.98	24.5	0.8	2.4	13.5
1	1 x 1.13	18.1	0.8	2.6	16.3
1.5	1 x 1.38	12.1	0.9	3.0	23.1
2.5	1 x 1.77	7.41	1.0	3.6	35.2

INSULATED WIRE

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

Omerin division siliisol

BP 87 - ZI du Devey - F 42000 Saint-Etienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
siliisol@omerin.com

omerin
LES CABLES DE L'EXTREME

www.omerin.com

® Registered trademark of the OMERIN Group. All information is indicative and may be modified without prior notice. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.