

BRAIDED INSULATING SLEEVINGS

SILIGAINÉ® 13F1-E


Expandable

-30 °C to +155 °C

Class F

FIBREGLASS EXPANDABLE SLEEVING
IMPREGNATED WITH POLYURETHANE VARNISH

ELECTRIC INSULATING SLEEVINGS
CLASS F - POLYURETHANE COATING

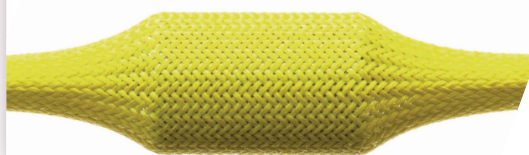

Standards*

- IEC 60684-1 and 60684-2.

Applications

- Sheathing of cable harnesses, all insulations class F.

Options

- Other diameters: contact us.
- Other colours: contact us.
- Sleeveings cut to length: contact us.

Packaging

- 100 m rolls.

Characteristics

General

- Continuous operating temperature: -30 °C to +155 °C.
- Expandable.
- Very good flexibility.
- Good resistance to oils and common chemical environments.
- Compatible with most impregnation varnishes class F.

Standard products

- Colour: yellow.

INTERNAL DIAMETER**

13F1-E

Nominal value (mm)	Minimum diameter (mm)	Maximum diameter (mm)	Approximate wall thickness (mm)	Approximate linear weight (kg/km)
8	8	16	0.7	20.0
12	12	24	0.8	38.0
25	25	35	0.9	63.0

*Standards: our products comply with all or part of the requirements of standards quoted; contact us.

** As these sleeveings are expandable, the internal diameters indicated correspond to a recommended operating range.

For this product, please contact:

OMERIN division principale ✓

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division siliisol □

BP 87 - ZI du Devey - F 42000 Saint-Étienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
siliisol@omerin.com

omerin
LES CABLES DE L'EXTREME

www.omerin.com

® Registered trademark of the OMERIN Group. All information is indicative and may be modified without prior notice. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.