

HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET SECTION I: CROSS LINKED ELASTOMERS

SILICABLE® ECSBECSP -60 °C to +180 °C



Approvals - standards

- Bureau VERITAS approval certificates no. 06465/DO BV: compliance with the tests described as per standards IEC 60092-350/353/360, IEC 60332-1-1/2, IEC 60332-3-22 and IEC 60331-11/21.
- Lloyd's Register approval certificates no. 06/00106: compliance with the tests described as per standards IEC 60228, IEC 60092-350/353/360, IEC 60332-1-1/2, IEC 60332-3-22 and IEC 60331-11/21.


Applications

- Industrial cabling in hot atmospheres up to 180 °C.
 - Cabling for rotating machines: motors, alternators, generators.
 - Cabling for static machines: transformers, inductors, inverters, choppers.
 - Shipbuilding and railway construction.
 - Power cabinets.
- Cabling requiring excellent mechanical strength.

Options

- Flexible bare copper core – class 5 as per IEC 60228 (ref. CSBECSP): contact us.
- Flexible silver-plated copper core – class 5 as per IEC 60228 (ref. ACSBECSP): contact us.
- Flexible nickel-plated copper core – class 5 as per IEC 60228 (ref. CNCSBECSP): contact us.
- Without reinforcing braid (ref. ECSBECSP): contact us.
- Varnished synthetic fibre reinforcing braid: contact us.
- Very high temperature fibre reinforcing braid: contact us.
 - Other colours: contact us.
- Other nominal cross-sections: contact us.
- Other nominal stranding: contact us.
- Other options and/or combinations of the options outlined above: contact us.

SILICONE INSULATED AND/OR SHEATHED WIRES AND CABLES WITH REINFORCING BRAID

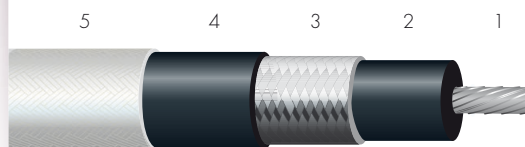

- 1 • Flexible tin-plated copper core - class 5 as per IEC 60228.
- 2 • Insulation: Silicone rubber.
- 3 • Electrical shielding: Tin-plated copper braid.
- 4 • Sheath: Silicone rubber.
- 5 • Reinforcement: Coated synthetic fibre braid.

Characteristics General

- Continuous operating temperatures: -60 °C to +180 °C.
- Good resistance to thermal shock and UV.
- Excellent mechanical strength.

Electrical

- Rated voltage: 600/1000 V.
- Test voltage: 3500 V.

Standard products

- Standard insulation colour: black.
- Standard sheath colour: black.
- Standard reinforcing braid colour: grey.

ECSBECSP

Flexible core • class 5 as per IEC 60228

Nominal cross-section (mm²)	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)
1.5	30 × 0.25	13.7
2.5	50 × 0.25	8.21
4	56 × 0.30	5.09
6	84 × 0.30	3.39
10	80 × 0.40	1.95
16	126 × 0.40	1.24
25	196 × 0.40	0.795
35	276 × 0.40	0.565
50	396 × 0.40	0.393
70	360 × 0.50	0.277
95	485 × 0.50	0.210
120	608 × 0.50	0.164
150	756 × 0.50	0.132
185	944 × 0.50	0.108
240	1221 × 0.50	0.0817
300	1525 × 0.50	0.0654

SHEATHED WIRE OR CABLE

Nominal diameter (mm)	Approximate linear weight (kg/km)
7.3	81
7.8	95
8.4	114
9.1	139
10.5	202
11.6	261
13.6	386
14.8	477
16.9	665
19.7	893
21.8	1129
24.1	1460
26.5	1788
28.9	2230
32.4	2859
35.5	3475

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

Omerin division silisol

BP 87 - ZI du Devey - F 42000 Saint-Etienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com